

# DURAG

## D-R 800

### Dust monitor

Innovative measuring device with laser technology to monitor small to medium dust emission according to the new European regulations.

#### Features

- **Integrated display: Measuring value, threshold value, parameter in probe**
- In-situ measuring procedure with continuous measurement
- High sensitivity
- Easy installation on one side of the duct
- Can also be deployed in thick-walled stone/insulated channels
- **Long lifetime, as there are no moving parts inside the duct**
- Hermetically sealed electronic housing against exhaust gas
- Parameterisation and operation with keyboard plus easily readable display directly on device or via bus interface
- Automatic function test with soiling correction
- Two analog outputs with adjustable measuring ranges
- **Automatic switching of measuring ranges according to 17. BImSchV.**

#### Applications

- Power stations
- Cement plants, the metallurgy and wood industries, chemical industry etc.
- Waste incineration plants
- Monitoring of dust filter plants.

#### Approvals

- Suitability-tested by the TÜV Cologne, test report 936/21205307/A
- Itemized in the list of suitable measuring devices for continuous emission measuring
- MCERTS pending.

#### DURAG, Inc.

1355 Mendota Heights Rd  
Suite 200  
Mendota Heights, MN 55120

Phone: 651-451-1710  
1-800-811-9852  
Fax: 651-457-7684

Email: environmental@durag.com  
www.durag.com

**DURAG smart solutions for**



#### Measuring principle


The D-R 800 device works according to the principle of forward scattering. The concentrated and modulated light of a laser diode penetrates the measuring volume. The forward-scattered light largely reflected from dust particles is measured and assessed.

#### System components

- Measuring lance
- Supply unit with integrated purge air supply
- Mounting flange 130 / 240 / 500 mm.

#### Options

- Weather protection cover
- **Temperature compensation through additional analog input.**

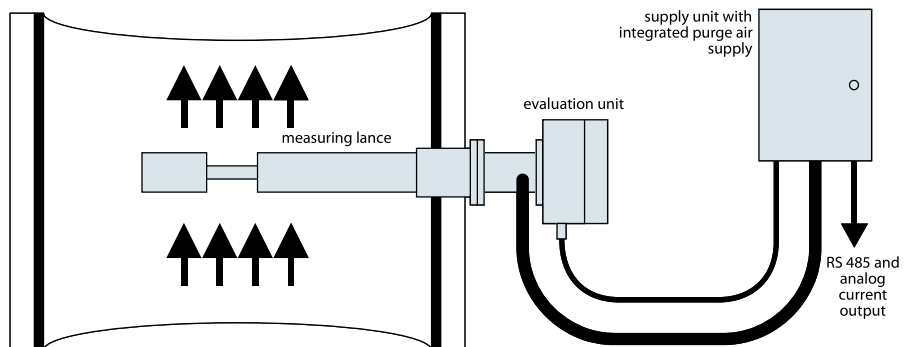

measurements	dust concentration	accuracy	<1% of measuring range limit
measuring ranges	0–10 mg/m <sup>3</sup> ... 0–200 mg/m <sup>3</sup> <sup>1)</sup>	detection limit	<0.5% measuring range
measuring principle	forward scattering	reference point drift	<0.7% of measuring range/month
flue gas temperature	above dew point up to 220 °C	zero point drift	<0.15 % of measuring range/month
flue gas pressure	-50 up to +10 hPa	supply voltage	85–264 VAC, 47–63 Hz, 50 VA
duct diameter	0.4–8 m	dimensions (h x w x d)	measuring lance: 160 x 160 x 600 / 1000 mm supply unit: 380 x 300 x 210 mm
probe length (from flange)	400 / 800 mm	weight	measuring lance: 7 kg supply unit: 13 kg
ambient temperature	-20 up to +50°C	purge air supply	integrated into supply unit
protection	IP65		
measuring outputs	2 x 0 / 4–20 mA / 500 Ohm, Modbus RTU (RS485)		
digital outputs	4 relay outputs, programmable, permissible load 24 V / 25 VA		
digital inputs	2 potential free inputs,	remarks	<sup>1)</sup> after gravimetric calibration